



Glass Passivated Bridge Rectifiers

GBL



Features

- Compliant with RoHS Provisions
- Low forward voltage, high forward current
- High forward surge current capability
- High heat-conducting performance
- Thermal welding performance:
260 °C/10sec

Applications

- Switching Power Supply
- Home Appliances, Office Devices
- Industrial Auto-equipments

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	GBL406	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	600	V
Maximum RMS voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	V
Average Rectified Output Current	I _o	4.0	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	120	A
I ² t rating for fusing (1ms< t < 8.3ms)	I ² t	60	A ² S
Maximum Forward Voltage at 2.0 A	V _F	1.1	V
Maximum DC Reverse Current @T _A =25 °C at Rated DC Blocking Voltage @T _A =125 °C	I _R	5 500	μA
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150	°C
Typical thermal resistance (Note 1)	R _{thJC} R _{thJA}	4.2 10.0	°C/W

Note: 1. Thermal resistance junction to case, lead and ambient in accordance with JESD-51.

Unit mounted on glass-epoxy substrate with 1oz/ft² 20x20 mm copper pad per pin with heatsink

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

Fig.1 Current Derating, Case

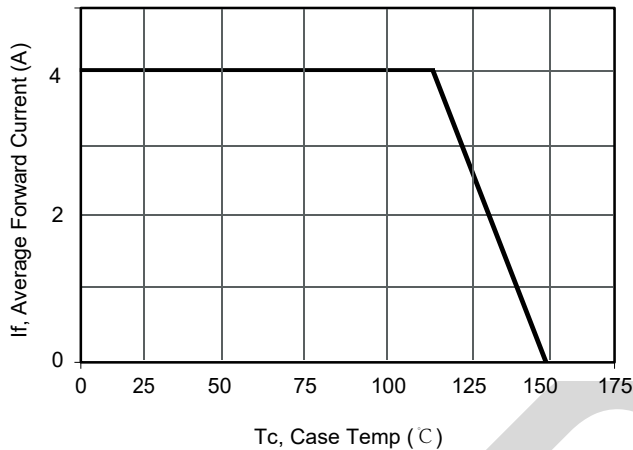


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

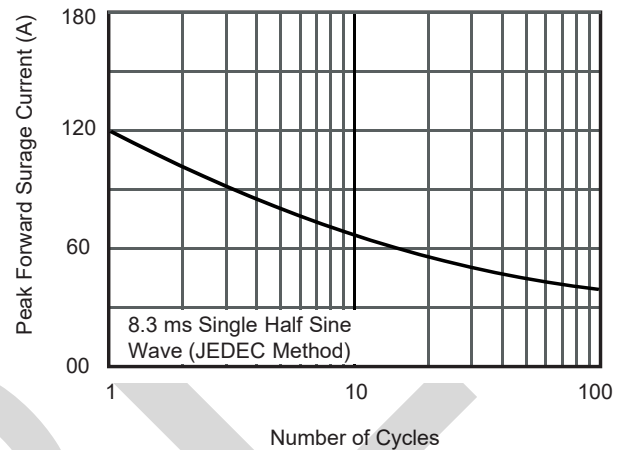


Fig.3 Typical Forward Voltage



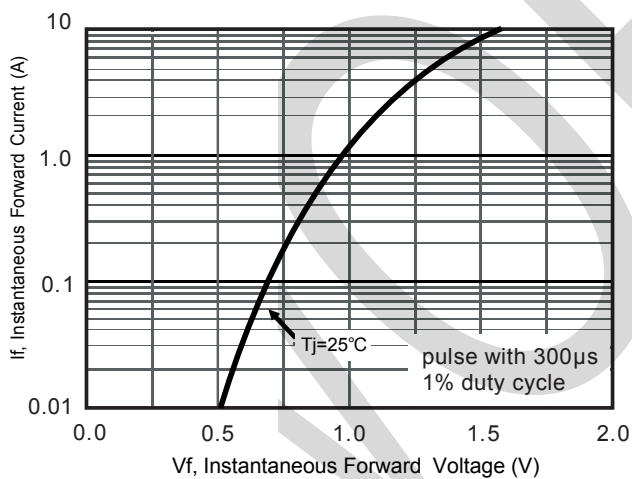



Fig.4 Typical Reverse Characteristics

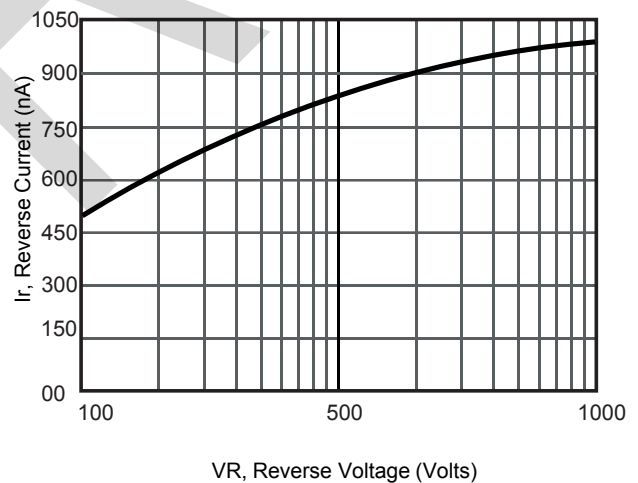

PACKAGE OUTLINE DIMENSIONS

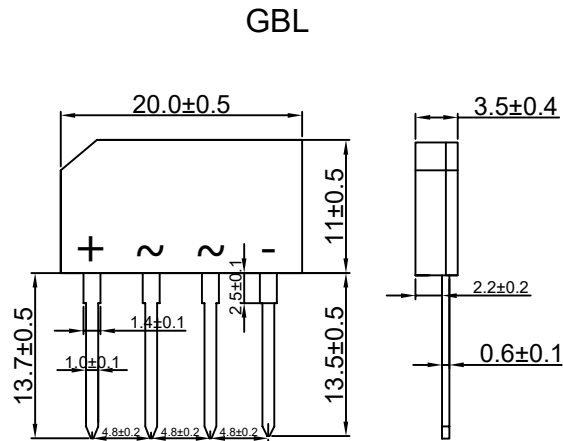

Marking Information

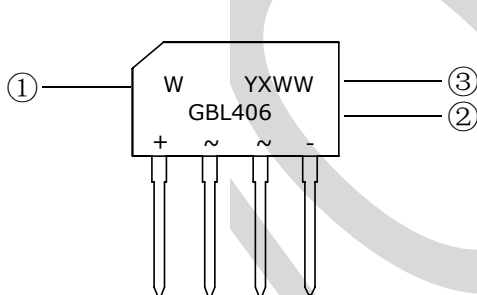

①W : Company's trademark

②Product model : GBL406

③PDC information :

Y X WW

WW:Week code(01 to 53)

X:Internal identification code

Y:Year code(ex:0=2020)